

2016

CertainTeed Roofing Selection Guide

Luxury, Designer and Traditional Shingles



Shown in (large photo)
Grand Manor Stonegate Gray,
(inset photos - clockwise)
Presidential Shake Charcoal Black,
Landmark Weathered Wood
and Presidential Shake Aged Bark
South Atlantic, Southeast and Mid-Atlantic (south)



Shown in Presidential Shake Shadow Gray

You know it, when you see it.

It's not just a roof. It's a CertainTeed roof.

Quality. Durability. Style. Color.

When you select a roof for your home,
there's a lot to consider.



That's when a roof becomes more than just a roof.
The same way a home is more than just a house.

You want the best for your home
and everything in it.

So why guess, when you can be **Certain**?



LUXURY SHINGLES

LUXURY SHINGLES



Shown in Capital Blend



Shown in Brownstone

Symphony®

- A specially engineered composite shingle that mimics the look and feel of natural slate
- Lighter and more durable than natural slate
- Exceptional UV fade-resistant surface technology for superior color stability
- 50-year limited, transferable warranty*
- 7-year SureStart™ protection
- 5-year 90 mph wind-resistance warranty
- Hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A (with approved underlayment)

Wind Resistance:

- Passed ASTM D3161 wind resistance at 110 mph

Impact Resistance:

- UL2218 Class 4


Color Availability



Colonial Gray
12" width



Capital Blend
12" width



Evergreen
12" width



Colonial Gray
6", 9" and 12" widths




Capital Blend
6", 9" and 12" widths



Evergreen
6", 9" and 12" widths

Color Availability




Black Pearl



Brownstone



Colonial Slate



Gatehouse Slate



Georgian Brick



Sherwood Forest



Stonegate Gray



Terra Cotta



Tudor Brown



Weathered Wood

GRAND MANOR®

- Two full-size, fiber glass base shingles with randomly applied tabs
- Authentic depth and dimension of natural slate
- Virtual five-layer coverage when applied
- 425 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL2218 Class 2

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389

LUXURY SHINGLES

LUXURY SHINGLES



Shown in Stonegate Gray

CARRIAGE HOUSE®

- Two full-size, fiber glass base shingles
- Unique chamfered cut for scalloped appearance
- Four-layer coverage when applied
- 355 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available.
- CertainTeed starter and CertainTeed hip and ridge required
- Hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL2218 Class 1

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389

GRAND MANOR and CARRIAGE HOUSE SHINGLES

These two shingles can be combined to create a myriad of custom patterns, emulating traditional slate roof designs.

Color Availability



Black Pearl



Brownstone



Colonial Slate



Gatehouse Slate



Georgian Brick



Sherwood Forest




Stonegate Gray



Victorian Blue

Color Availability

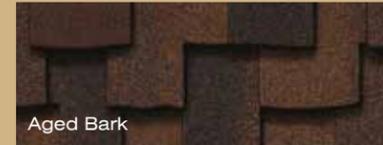

Aged Bark



Autumn Blend




Charcoal Black



Chestnut



Classic Weathered Wood

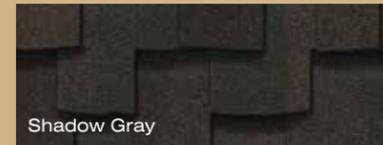

Shadow Gray



Spanish Tile



Weathered Wood



Shown in Charcoal Black

PRESIDENTIAL SHAKE® TL

Triple Laminate

- Three-piece laminated fiber glass construction
- Distinctive sculpted, rustic look
- 480 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available.
- CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389

LUXURY SHINGLES

LUXURY SHINGLES



Shown in Aged Bark

PRESIDENTIAL SHAKE®

- Two-piece laminated fiber glass construction
- Distinctive sculpted, rustic look
- 355 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- Impact Resistant version available (select colors**) 
- ENERGY STAR® qualified version available: Presidential Solaris® Gold meets both solar reflectance and thermal emissivity requirements. (select color***) 

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Impact Resistance:

- Presidential Shake IR is UL2218, Class 4 Impact Resistance (select colors only)

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.


Quality Standards:

- ICC-ES-ESR-1389

Color Availability




Aged Bark



Autumn Blend**



Chaparral Cedar




Charcoal Black



Chestnut



Classic Weathered Wood**



Shadow Gray**



Slate Gray



Weathered Wood**



Max Def Weathered Wood***



Shown in Max Def Shenandoah

Color Availability



Max Def Burnt Sienna




Max Def Cobblestone Gray



Max Def Colonial Slate



Max Def Moire Black



Max Def Old Overton



Max Def Resawn Shake



Max Def Shenandoah



Max Def Weathered Wood

LANDMARK® TL

Triple Laminated

- Three-piece laminated fiber glass construction
- Rustic appearance of hand-split wood shakes
- 305 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389

DESIGNER SHINGLES DESIGNER SHINGLES



Shown in Max Def Moire Black



Shown in Weathered Wood

LANDMARK[®] PRO

- Two-piece laminated fiber glass base construction
- Classic shades and dimensional appearance of natural wood or slate
- 250 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter[®] algae-resistance warranty
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.


Quality Standards:

- ICC-ES-ESR-1389

Also available in Landmark[®] Premium:

A heavier weight product (300 lb. per square) available in two maximum definition colors (Max Def Moire Black and Max Def Weathered Wood) with the same warranties and performance ratings as Landmark Pro.

Color Availability

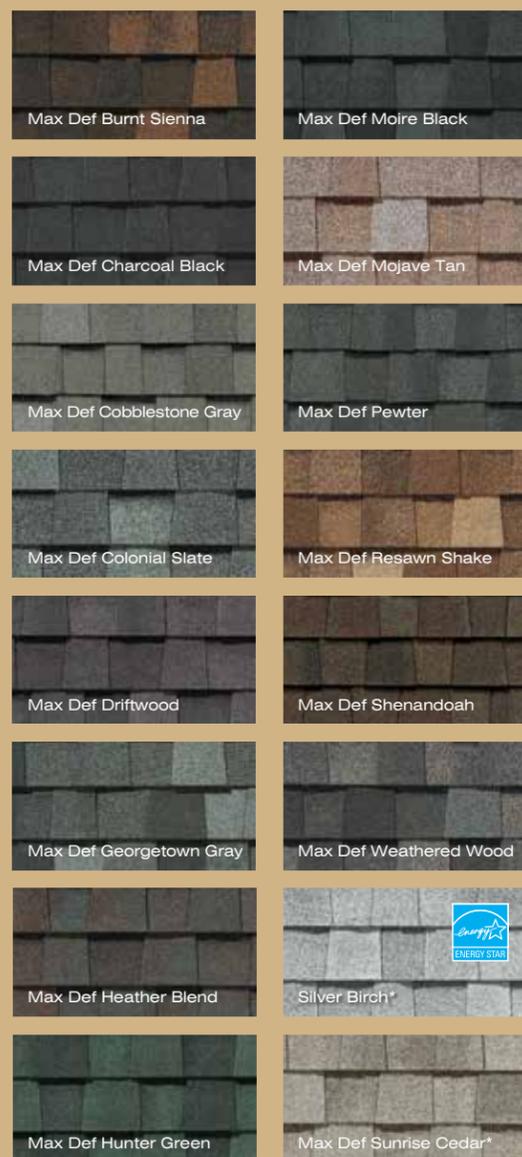

* Not available in all areas

Color Availability



* Not available in all areas

LANDMARK[®]

- Two-piece laminated fiber glass base construction
- Classic shades and dimensional appearance of natural wood or slate
- 229/235 lbs. per square
- Lifetime limited transferable warranty*
- 10-year StreakFighter[®] algae-resistance warranty
- 10-year SureStart[™] protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389

DESIGNER SHINGLES

DESIGNER SHINGLES



Shown in Colonial Slate

Color Availability



Burnt Sienna



Colonial Slate



Cumberland



Heather Blend



Max Def Weathered Wood



Moiré Black



Resawn Shake



Shenandoah



Weathered Wood

LANDMARK[®]

Impact Resistant

- Fiber glass-based construction
- 250 lbs. per square
- Lifetime limited transferable warranty*
- 10-year SureStart™ protection
- 10-year StreakFighter® algae-resistance warranty
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5-98

Impact Resistance:

- UL2218 Class 4

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389



Color Availability

LANDMARK SOLARIS GOLD



Max Def Resawn Shake**



Max Def Weathered Wood**

LANDMARK SOLARIS PLATINUM



Sierra Buff



Coastal Tan



Santa Fe

Solaris[®]

SOLAR REFLECTIVE SHINGLES

- Two-piece laminated fiber glass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- 229/250 lbs. per square
- Meets ENERGY STAR® requirements
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Impact Resistant version available (select colors**) 

* See warranty for specific details and limitations.

Landmark Solaris Solar Reflectivity (SR), Thermal Emittance (TE) & Solar Reflectance Index (SRI) Data

Solaris Blend Name	CRRC Initial SR	CRRC Initial TE	ASTM E408 TE	Solar Reflectance Index (SRI)*
LANDMARK SOLARIS GOLD				
Max Def Resawn Shake	.26	.88	.96	29
Max Def Weathered Wood	.26	.90	.95	29
LANDMARK SOLARIS PLATINUM				
Sierra Buff	.41	.92	.95	48
Coastal Tan	.40	.91	.95	47
Santa Fe	.40	.90	.94	47




* Solar Reflectance Index (SRI) values were calculated using ASTM E408 TE values.

DESIGNER SHINGLES



Shown in Fieldstone

Color Availability

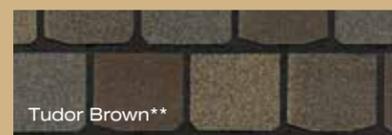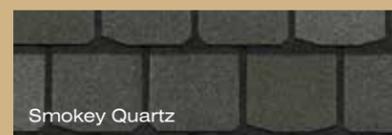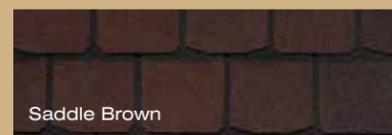

DESIGNER SHINGLES



Shown in Weathered Wood

Color Availability



Highland Slate®

- Single layer fiber glass-based construction
- Blended shades and dimensional appearance of natural slate
- 8" exposure, 18" x 36" size, 240 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Impact Resistant version available (select colors**) 

* See warranty for specific details and limitations.

Fire Resistance:

- UL Certified to meet ASTM D3018, Type 1
- UL 790 Class A
- ASTM E 108 Class A

Wind Resistance:

- UL 2390/ASTM D 6381 Class H
- ASTM D3161 Class F

Impact Resistance:

- Highland Slate IR is UL2218, Class 4 (select colors only)

Tear Resistance:

- UL Certified to meet ASTM D3462
- CSA Standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389

INDEPENDENCE®

- One full-size, fiber glass base shingle with randomly applied tabs
- Deep shadow lines and random tabs create a distinct dimensional look
- 250 lbs. per square
- Lifetime limited transferable warranty – residential*
- 50-year limited transferable warranty – group-owned or commercial*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Impact Resistance:

- UL2218 Class 1

DESIGNER SHINGLES

TRADITIONAL SHINGLES



Shown in:
Roof - Tudor Brown
Siding - Cedar Impressions® Double 7" Straight Edge Rough-Split Shakes - Savannah Wicker



Shown in Graystone

Hatteras®

- Oversized extra-heavy fiber glass mat with dual strips of CertaSeal™ Plus advanced modified sealant
- Deep shadow lines create look of natural slate
- 235 lbs. per square
- Lifetime limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.


Quality Standards:

- ICC-ES-ESR-1389

Color Availability




Colonial Slate



Cottage Red




Georgetown Gray




Hunter Green



Moire Black



Tudor Brown

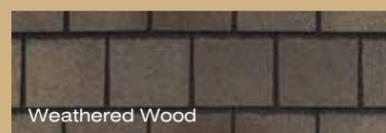

Weathered Wood

Color Availability



Colonial Slate



Driftwood



Graystone



Prairie Wood



Shadow Black



Weathered Wood

PATRIOT

- Architectural style shingles
- Single layer fiber glass-based construction
- Intricate color blend drops combined with intermittent shadow lines
- 215 lbs. per square
- 30-year limited transferable warranty*
- 10-year StreakFighter® algae-resistance warranty
- 8-year SureStart™ protection
- 10-year 110 mph wind-resistance warranty

* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3161 Class F
- UL certified to meet ASTM D7158 Class H

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

TRADITIONAL SHINGLES



In addition to a full contingent of luxury and designer shingles (architectural shingles), CertainTeed features the industry's broadest line of traditional shingles (3-tab shingles). They're all designed for long-lasting performance and durability.

CT™ 20

- Fiber glass composition
 - 195 lbs. per square
 - 20-year limited transferable warranty**
 - 3-year SureStart™ protection
 - 5-year 60 mph wind-resistance warranty
- ** See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389

Cedar Brown
Dove Gray
Moire Black
Weathered Wood

CertainTeed **XT25**

- Fiber glass composition
 - 205 lbs. per square
 - 25-year limited transferable warranty**
 - 10-year StreakFighter® algae-resistance warranty
 - 5-year SureStart™ protection
 - 5-year 60 mph wind-resistance
- ** See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

Wind Driven Rain Resistance:

- Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

Quality Standards:

- ICC-ES-ESR-1389

Black
Cedar Brown
Cinnamon Frost
Dove Gray
Evergreen Blend
Heather Blend

Mint Frost
Moire Black
Nickel Gray
Oakwood
Silver Lining
Slate Gray


Star White
Tile Red Blend
Timber Blend
Weathered Wood

HIP AND RIDGE ACCESSORIES



Shangle® Ridge Accessory

- Hip and ridge capping
- Two full layers
- 12" width allows application over standard ridge vents
- Full 8" exposure
- Matches all Grand Manor, Highland Slate and Carriage House colors
- Algae resistant



Shadow Ridge®

- Used for hip and ridge capping
- Single-layer coverage for product versatility
- Sealant strip for maximum adherence
- Dimensions are 12" x 12", with a 5" exposure
- Can be used on shingle-over vents or directly over centerline of hip or ridge
- Available in complementary product colors (see individual Roofing Plant Catalogs for color availability)



Solaris® Hip and Ridge

- Used for hip and ridge capping
- Matches Landmark Solaris shingle colors
- Covers 33.75 lineal feet per bundle; 24 shingles per bundle



Cedar Crest®

- Dimensions are (overall) 12" x 36", separated into individual pieces 12" x 12", with an 8" exposure
- Covers 20 lineal feet per bundle
- Matches Landmark Series, Landmark TL, Presidential Shake, Presidential Shake TL, Highland Slate and Hatteras colors



Symphony®

- Used for hip and ridge capping
- Matches Symphony colors

Integrity Roof System™



A systems approach combines high-performance components – underlayments, shingles, accessory products and ventilation – to make the Integrity Roof System a complete roofing solution. When you choose an Integrity Roof System, you gain the advantage of having CertainTeed as your single manufacturing source to stand behind its roof system components.

WinterGuard®

Waterproofing shingle underlayment prevents leaks from wind-driven rain and ice dams in vulnerable areas.

Roofers' Select® or DiamondDeck®

High-performance underlayment provides a protective water-resistant layer over the roof deck and a secondary barrier against leaks.

Starter Shingles

Starter shingles are designed to work specifically with each different type of CertainTeed shingle for maximum performance.

CertainTeed Shingles

High-quality shingles available in a wide variety of styles and colors, covered by the strongest warranty in the business.

Flat Roofs

Flintlastic roofing products are available for flat roof areas.

Hip & Ridge Caps




Accessory shingles are used to finish the hips and ridges of the roof and are designed to complement the appearance of CertainTeed shingles.

CertainTeed Ridge Vents

CertainTeed Ridge Vents combined with sufficient intake vents, such as CertainTeed Intake Vents, are the most effective ventilation system.

SELECTION GUIDE


LUXURY SHINGLES

Shingle Construction and Description		Weight (lbs. per square)	UL Class A Fire Resistance Rating	UL Certified to Meet ASTM D3462	UL Certified to Meet ASTM D3018 Type 1	UL 2218 Impact Resistance Rating	ASTM D3161 Wind Resistance	Miami-Dade Product Control Acceptance	Conforms To CSA Standard A123.5	Limited Transferable Warranty Against Manufacturing Defects <small>*50-Year on Group-owned or Commercial Applications</small>	StreakFighter algae-resistance Warranty (where available)	SureStart Protection	Wind-Resistance Warranty <small>Upgraded wind warranty available. See warranty for details and limitations</small>	Shingle Size	Bundles Per Square
Grand Manor	 Two full-size, fiber glass base shingles with randomly applied tabs; Authentic depth and dimension of natural slate; Virtual five-layer coverage when applied	425	✓	✓	✓	Class 2	Class F, 110 mph	✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
Carriage House	 Two full-size, fiber glass base shingles; Unique chamfered cut for scalloped appearance; Four-layer coverage when applied	355	✓	✓	✓	Class 1	Class F, 110 mph	✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	5
Presidential Shake TL	 Three-piece laminated fiber glass construction; Distinctive sculpted, rustic look	480	✓	✓	✓		Class F, 110 mph	✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	6
Presidential Shake <small>Impact Resistant Version Available</small>	 Two-piece laminated fiber glass base construction; Distinctive sculpted, rustic look	355	✓	✓	✓	Class 4	Class F, 110 mph	✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	5
Presidential Solaris	 Three-piece laminated fiber glass base construction; Distinctive sculpted, rustic look 	355	✓	✓	✓		Class F, 110 mph	✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	14 1/4" x 40" 4" Exposure	5
Landmark TL	 Three-piece laminated fiber glass construction; Rustic appearance of hand-split wood shakes	305	✓	✓	✓		Class F, 110 mph	✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 40" 5 5/8" Exposure	4


COMPOSITE SLATE

Symphony	 A specially engineered composite roofing shingle that mimics the look and feel of natural slate; Lighter and more durable than natural slate; exceptional UV fade-resistant surface technology	varies	✓***			Class 4	Passed at 110 mph			50-year		7-year	5-year 90 mph	18" x 6", 9" & 12"	varies
----------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------	------	--	--	---------	-------------------	--	--	---------	--	--------	---------------	--------------------	--------

DESIGNER SHINGLES

Landmark Pro	 Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate	250	✓	✓	✓		Class F, 110 mph	✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
Landmark Premium	 Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate	300	✓	✓	✓		Class F, 110 mph	✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	4
Landmark <small>Impact Resistant Version Available</small>	 Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate	229/235 250	✓	✓	✓	Class 4	Class F, 110 mph	✓	✓	Lifetime	10-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
Landmark Solaris <small>Impact Resistant Version Available</small>	 Two-piece laminated fiber glass base construction; Classic shades and dimensional appearance of natural wood or slate 	229/250	✓	✓	✓	Class 4	Class F, 110 mph	✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	13 1/4" x 38 3/4" 5 5/8" Exposure	3
Highland Slate <small>Impact Resistant Version Available (select colors)</small>	 Single layer fiber glass base construction; Blended shades and dimensional appearance of natural slate	240	✓	✓	✓	Class 4	Class F, 110 mph	✓	✓	Lifetime*	15-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	3
Independence	 One full-size, fiber glass base shingle with randomly applied tabs; Deep shadow lines and random tabs create a distinct dimensional look	250	✓	✓	✓	Class 1	✓		✓	Lifetime*	15-year	10-year	15-year 110 mph **	12" x 36" 5" Exposure	4
Hatteras	 Oversized extra-heavy fiber glass mat with dual strips of CertaSeal Plus advanced modified sealant; Deep shadow lines create look of natural slate	235	✓	✓	✓		Class F, 110 mph	✓	✓	Lifetime	10-year	10-year	15-year 110 mph **	18" x 36" 8" Exposure	3
Patriot	 Architectural style shingle; Single layer fiber glass base construction; Intricate color blend drops combined with intermittent shadow lines	215	✓	✓	✓		Class F, 110 mph		✓	30-year	10-year	8-year	10-year 110 mph	13 1/4" x 39 3/8" 5 5/8" Exposure	3

TRADITIONAL SHINGLES

XT 25	 Fiber glass composition; Designed for long-lasting performance and durability	205	✓	✓	✓		Class F, 110 mph	✓	✓	25-year	10-year	5-year	5-year 60 mph	12" x 36" 5" Exposure	3
CT 20	 Fiber glass composition; Designed for long-lasting performance and durability	195	✓	✓	✓		Class F, 110 mph	✓	✓	20-year		3-year	5-year 60 mph	12" x 36" 5" Exposure	3

High-Performance Starter

Starter Course shingle specifically for use with Grand Manor, Highland Slate and Hatteras—and the only approved installation alternative to using the shingles themselves.

- 10" x 36", 102 lineal ft. per bundle, 34 shingles per bundle
- Provides labor and cost savings by not cutting shingles
- Dual sealant strip for increased wind resistance
- Better look with straight factory-cut eave edge

Presidential Starter

Required for Presidential Shake TL and Presidential Shake applications.

- 13 1/4" x 40" (required double layer), 36.5 lineal ft. per bundle (based on 2-layer application), 22 shingles per bundle
- Two layers of straight factory-cut eave edge
- Available in the entire Presidential Shake TL and Presidential Shake color line
- Assures Class A fire rating
- Saves significant installation time

Symphony® Hip and Ridge

- Full line of hip and ridge accessories to complement and enhance the slate-inspired look of Symphony.

CertainTeed Swiftstart®

CertainTeed Swiftstart metric starter shingle is designed specifically for use with CertainTeed Landmark Series shingles. Rather than cutting expensive field shingles to use as starters, you can save time and money by starting with Swiftstart.

- Code-compliant, meets min. 2" headlap requirement for metric shingles; many competing products do not
- Each 18-piece bundle covers 116 lineal ft.
- Recommended for use to obtain enhanced warranties

Ventilation

- CertainTeed Ridge Vent 12" unfiltered
- CertainTeed Ridge Vent 12" filtered
- CertainTeed Rolled Ridge Vent unfiltered
- CertainTeed Intake Vent filtered
- CertainTeed Static Vent - Aluminum and Plastic

STREAK Fighter[®] algae-resistance protection

What is StreakFighter? It's a special feature that protects a wide range of CertainTeed shingles from the streaking, spotting and discoloration caused by airborne algae. StreakFighter helps safeguard a roof's beauty, especially in humid areas.

SureStart[™] protection



Because CertainTeed roofing products are manufactured to the highest quality standards, we confidently include the additional assurance of SureStart[™] protection with all CertainTeed shingles. SureStart provides the strongest protection you can get in the vital early years after your new roof has been installed.

Simply put, if a manufacturing defect is discovered during the SureStart period, CertainTeed will provide reimbursement of 100% of the cost of the shingles and labor to repair the defective shingles or apply new shingles to replace the defective shingles. See actual warranty for details and limitations.

Roofers' Select[®] HIGH PERFORMANCE UNDERLAYMENT

This revolutionary high-performance underlayment combines new technology with the best attributes of true 15 and 30 lb. felt.

- Lays flat and is extremely resistant to wrinkling
- Reduces the likelihood of slipping for increased safety
- Doesn't tear away from fasteners when walked on or in strong wind
- Meets underlayment requirements for the CertainTeed Integrity Roof System[™]

DiamondDeck[®]

DiamondDeck is a synthetic, scrim-reinforced, water-resistant underlayment that can be used beneath shingle, shake, metal, or slate roofing. It is manufactured to provide best-in-class performance in terms of both weather protection and contractor safety. 10-square roll (4-foot wide and 250-foot long) is easier to handle and faster to apply than standard felt rolls.

WinterGuard[®]



When snow and ice melt, trapped water can infiltrate to damage the roof deck and building interior.

WinterGuard is installed under shingled roofing to prevent water damage from ice dams, as well as wind-driven rain.

WinterGuard Sand and WinterGuard Granular are designed for use on roof decks as a waterproofing underlayment beneath shingle, slate and tile roofs to prevent leakage due to water backup from ice dams or wind-driven rain. WinterGuard HT, an advanced waterproofing underlayment, is specially formulated to resist high roof temperatures and is the only WinterGuard product to be warranted for use under metal roofs. WinterGuard is most commonly used in critical areas such as roof eaves, valleys and low-slope applications.

WinterGuard is classified by Underwriters Laboratories (UL) to be a suitable underlayment for use in any UL Class A, B or C fire rated shingle system, and it is manufactured to meet ASTM D1970.

For specific details and limitations, refer to the actual product warranties.

MetaLayment[®] Self-Adhering Metal Underlayment

MetaLayment has a tough, tear-resistant film on its top surface that will not scratch roofing metal applied over it. The adhesive bottom surface of MetaLayment is protected with a disposable silicone-coated release film, which is split longitudinally down the middle for easier application. Manufactured to meet ASTM D1970.

CertainTeed

SAINT-GOBAIN



easy selection

Color Companion Products[™]

With CertainTeed Flintlastic[®] SA, you can coordinate flat roof areas like carports, canopies and porches with your main roof. Flintlastic SA is a self-adhering low-slope roofing product available in eight colors that match some of the most popular CertainTeed shingles. Ask your contractor for more information.

Shown in Landmark Weathered Wood



What's behind our #1 rating?

Builders and remodelers across America know certain things to be true of CertainTeed. For starters, we've been in the roofing business for over 100 years. We have thousands of satisfied homeowners. The process of building that satisfaction begins the moment you turn to us.

CertainTeed offers you the broadest range of color and style choices. But you'll see it's not style over substance. You'll get a roof that's made from the highest quality materials and backed by a strong warranty program. It's our promise to you: quality made certain, satisfaction guaranteed.

NOTE: Due to limitations of printing reproduction, CertainTeed can not guarantee the identical match of the actual product color to the graphic representations throughout this publication.

Your home is a reflection of your lifestyle.

From the way your furniture complements your wall colors to the way your roofline interacts with the landscaping.

 What does your home say about you?



Reaching for the ENERGY STARS.

As a 2015 ENERGY STAR Sustained Excellence recipient for Energy Management, we are proud of our commitment to designing high quality, sustainable roofing products.



The best formula under one roof. We start with the highest-quality raw materials and add state-of-the-art technology to monitor our manufacturing process and test our finished products. The result is superior performance from beginning to end.

Products available in areas shown



ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • DECKING • RAILING • FENCE
GYPSUM • CEILINGS • INSULATION

www.certainteed.com <http://blog.certainteed.com>

CertainTeed Corporation
20 Moores Road
Malvern, PA 19355

Professional: 800-233-8990
Consumer: 800-782-8777

© 2016 CertainTeed Corporation, Printed in U.S.A.
Code No. 20-20-1703

